



Sand Replacement Test Sets

The Sand Replacement Test Set is used to measure the degree of compaction on site. The Complete set comprises of a calibration container, tray and pouring cylinder. The pouring cylinder has been precisely machined and is made of cast aluminium. The tray and calibration container are made of plated sheet steel. The test set comes in three different sizes.

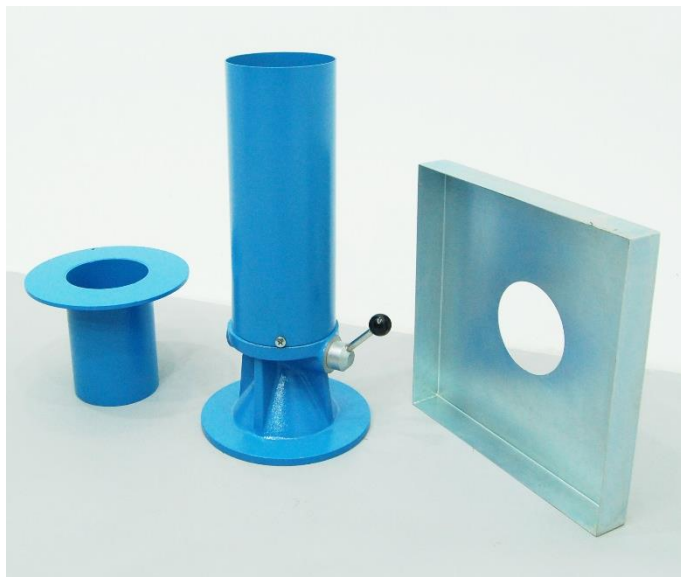

UTS-0900

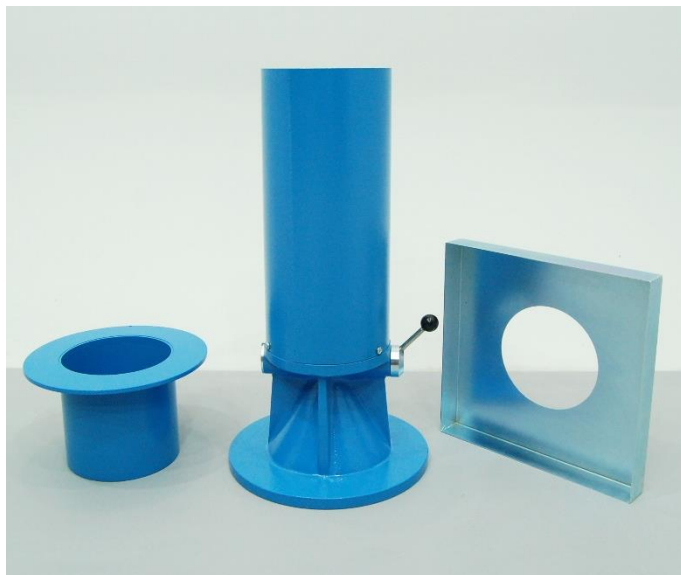

UTS-0910

Technical Specifications

Product Code	Dimensions	Weight (approx.)
UTS-0900	300x300x440 mm	8 kg
UTS-0910	300x300x500 mm	14 kg
UTS-0920	500x500x660 mm	27 kg

About PCTE

PCTE have over 30 years' experience in the measurement and testing of construction materials. PCTE can provide more than just the equipment, they can provide expert training. PCTE have a service centre in Sydney in which they can provide calibration, repairs and warranty repairs.

Other Equipment

PCTE supply three main ranges: NDT, Lab and Geotech Instrumentation.

NDT includes: Rebound Hammers, Covermeters, Ultrasonics, GPR, Corrosion Testing, Coating Testing and Foundation Testing

Lab includes equipment for: Concrete, Cement, Aggregate, Soil, Asphalt and Metal

Geotech Instrumentation includes: Strain Gauges, Piezometers, Inclometers, Extensometers, Tiltmeters, Load Cells and Dataloggers